

# Industrial Coatings

## Technical Data Sheet

# Irganox<sup>®</sup> 245



### Product Description


Irganox<sup>®</sup> 245 is a phenolic primary antioxidant for processing and long term thermal stabilization.

### Key Features & Benefits

- High extraction resistance
- Low volatility
- Odorless
- Good color stability

### Chemical Composition

Ethylene bis(oxyethylene) bis-(3-(5-tert-butyl-4-hydroxy-m-tolyl)propionate)

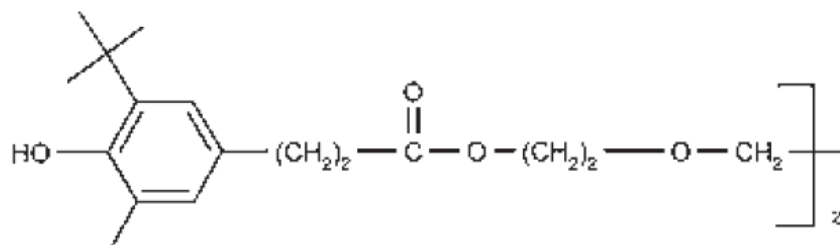

## Properties

### Typical Properties

Appearance	white, free-flowing powder
CAS number	36443-68-2
Molecular weight	586.8 g/mol
Melting range	76 – 79°C
Flash point	> 150°C
Vapor pressure at 20°C	4 E-8 Pa
Density at 20°C	1.14 g/ml

### Solubility at 25°C (g/100 g solution)

Acetone	> 50
Benzene	18
Chloroform	> 40
Ethyl acetate	37
Ethanol	10
n-Hexane	< 0.1
Methanol	12
Methylene chloride	> 40
Toluene	6
Styrene	6
Polyetherol	~ 3
Water	< 0.01

**Volatility (TGA, air at 20 K/min)**

Temperature at 1% weight loss 280°C

Temperature at 10% weight loss 330°C

These typical values should not be interpreted as specifications.

---

**Applications**

Irganox® 245 is a sterically hindered phenolic antioxidant that protects organic substrates against thermo-oxidative degradation during manufacturing, processing, and end use.

Irganox® 245 is effective in styrene polymers, particularly impact-modified polystyrenes, ABS, MBS, SB, and SBR-latices, as well as in POM homo- and co-polymers. It is also very useful for the stabilization of polyurethanes, polyamides, thermoplastic polyesters, PVC, and other polymers. In addition to imparting thermostability to the finished polymer, it is effective as a chain stopper during PVC polymerization.

Irganox® 245 can be used in combination with other additives such as co-stabilizers (e.g. thioesters, phosphites, phosphonites), light stabilizers, and other functional stabilizers. The effectiveness of Irganox® 245 with Irgafos® 168 is particularly noteworthy.

Irganox® 245 is recommended for applications such as:

- Hot-melt adhesives
- Sealants
- Solvent-based coatings

**Recommended Concentrations**

The amount of Irganox® 245 required for optimum performance should be determined in trials covering a concentration range. Concentrations up to 1.0% can be used depending upon the substrate, processing conditions, long term thermal stability requirements, and end application requirements.

0.05 – 0.1% of Irganox® 245 provides long term thermal stability to the polymer.

---

**Safety****General**

The usual safety precautions when handling chemicals must be observed. These include the measures described in Federal, State, and Local health and safety regulations, thorough ventilation of the workplace, good skin care, and wearing of protective goggles.

**Material Safety Data Sheet**

All safety information is provided in the Material Safety Data Sheet for Irganox® 245.

---

**Storage**

Properly stored and protected, an unopened container of Irganox® 245 should have a shelf life of at least one year.

---

## Important

The descriptions, designs, and data contained herein are presented for your guidance only. Because there are many factors under your control which may affect processing or application/use it is necessary for you to make appropriate tests to determine whether the product is suitable for your particular purpose prior to use. **NO WARRANTIES OF ANY KIND, EITHER EXPRESS OR IMPLIED, INCLUDING WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE, ARE MADE REGARDING PRODUCTS DESCRIBED OR DESIGNS, OR INFORMATION SET FORTH, OR THAT THE PRODUCTS, DESIGNS, OR DATA MAY BE USED WITHOUT INFRINGING THE INTELLECTUAL PROPERTY RIGHTS OF OTHERS. IN NO CASE SHALL THE DESCRIPTIONS, DATA OR DESIGNS PROVIDED BE PRESUMED TO BE A PART OF OUR TERMS AND CONDITIONS OF SALE.** Further, you expressly understand and agree that the descriptions, designs, and data furnished by BASF hereunder are given gratis and BASF assumes no obligation or liability for same or results obtained from use thereof, all such being given to you and accepted by you at your risk.

*Irganox is a registered trademark of BASF Group.*

BASF Corporation, 2015



BASF Corporation is fully committed to the Responsible Care® initiative in the USA, Canada, and Mexico. For more information on Responsible Care® go to:  
U.S.: [www.basf.us/responsiblecare\\_usa](http://www.basf.us/responsiblecare_usa)  
Canada: [www.basf.us/responsiblecare\\_canada](http://www.basf.us/responsiblecare_canada)  
México: [www.basf.us/responsiblecare\\_mexico](http://www.basf.us/responsiblecare_mexico)

BASF Corporation  
Dispersions and Pigments  
11501 Steele Creek Road  
Charlotte, North Carolina 28273  
Phone: (800) 251 – 0612  
Email: [edtech\\_info@basf.com](mailto:edtech_info@basf.com)  
[www.basf.us/dpsolutions](http://www.basf.us/dpsolutions)